


Technical Documentation of the K-Band Receiver 18 - 26.5 GHz (S14mm)

Type	HEMT cooled				
Channels	28	upper/lower band of 2 polarizations in 2 horns each + 20 zoom bands			
Receiver Noise	30K				
Frequency range	18 GHz - 26.5 GHz				
Polarization	LHC/RHC	2 horns			
Calibration	Noise diode	5 MHz phase cal			
1st IF	5.6 - 10 GHz				
2nd IF lower band	0 - 4 GHz	0 - 2.5 GHz	0 - 300 MHz		fsynth.21 = 10 GHz
2nd IF upper band		0 - 2.5 GHz	0 - 300 MHz		fsynth.22 = 5.6 GHz
<i>Synthesizer frequency for fsky at center of:</i>	<i>4 GHz IF</i>	<i>2.5 GHz IF</i>	<i>300 MHz IF</i>	<i>0.5-1 GHz IF</i>	
Highband (Ch.1, 3, 5...) fsynth.1,3,5...:	fsky - 8 GHz	fsky - 8.75 GHz	fsky - 9.85 GHz	fsky - 9.25GHz	(preset 16.0 GHz)
Lowband (Ch.2, 4, 6...): fsynth.2,4,6...:		fsky - 8.75 GHz	fsky - 9.85 GHz	fsky - 9.25GHz	(preset 12.4 GHz)

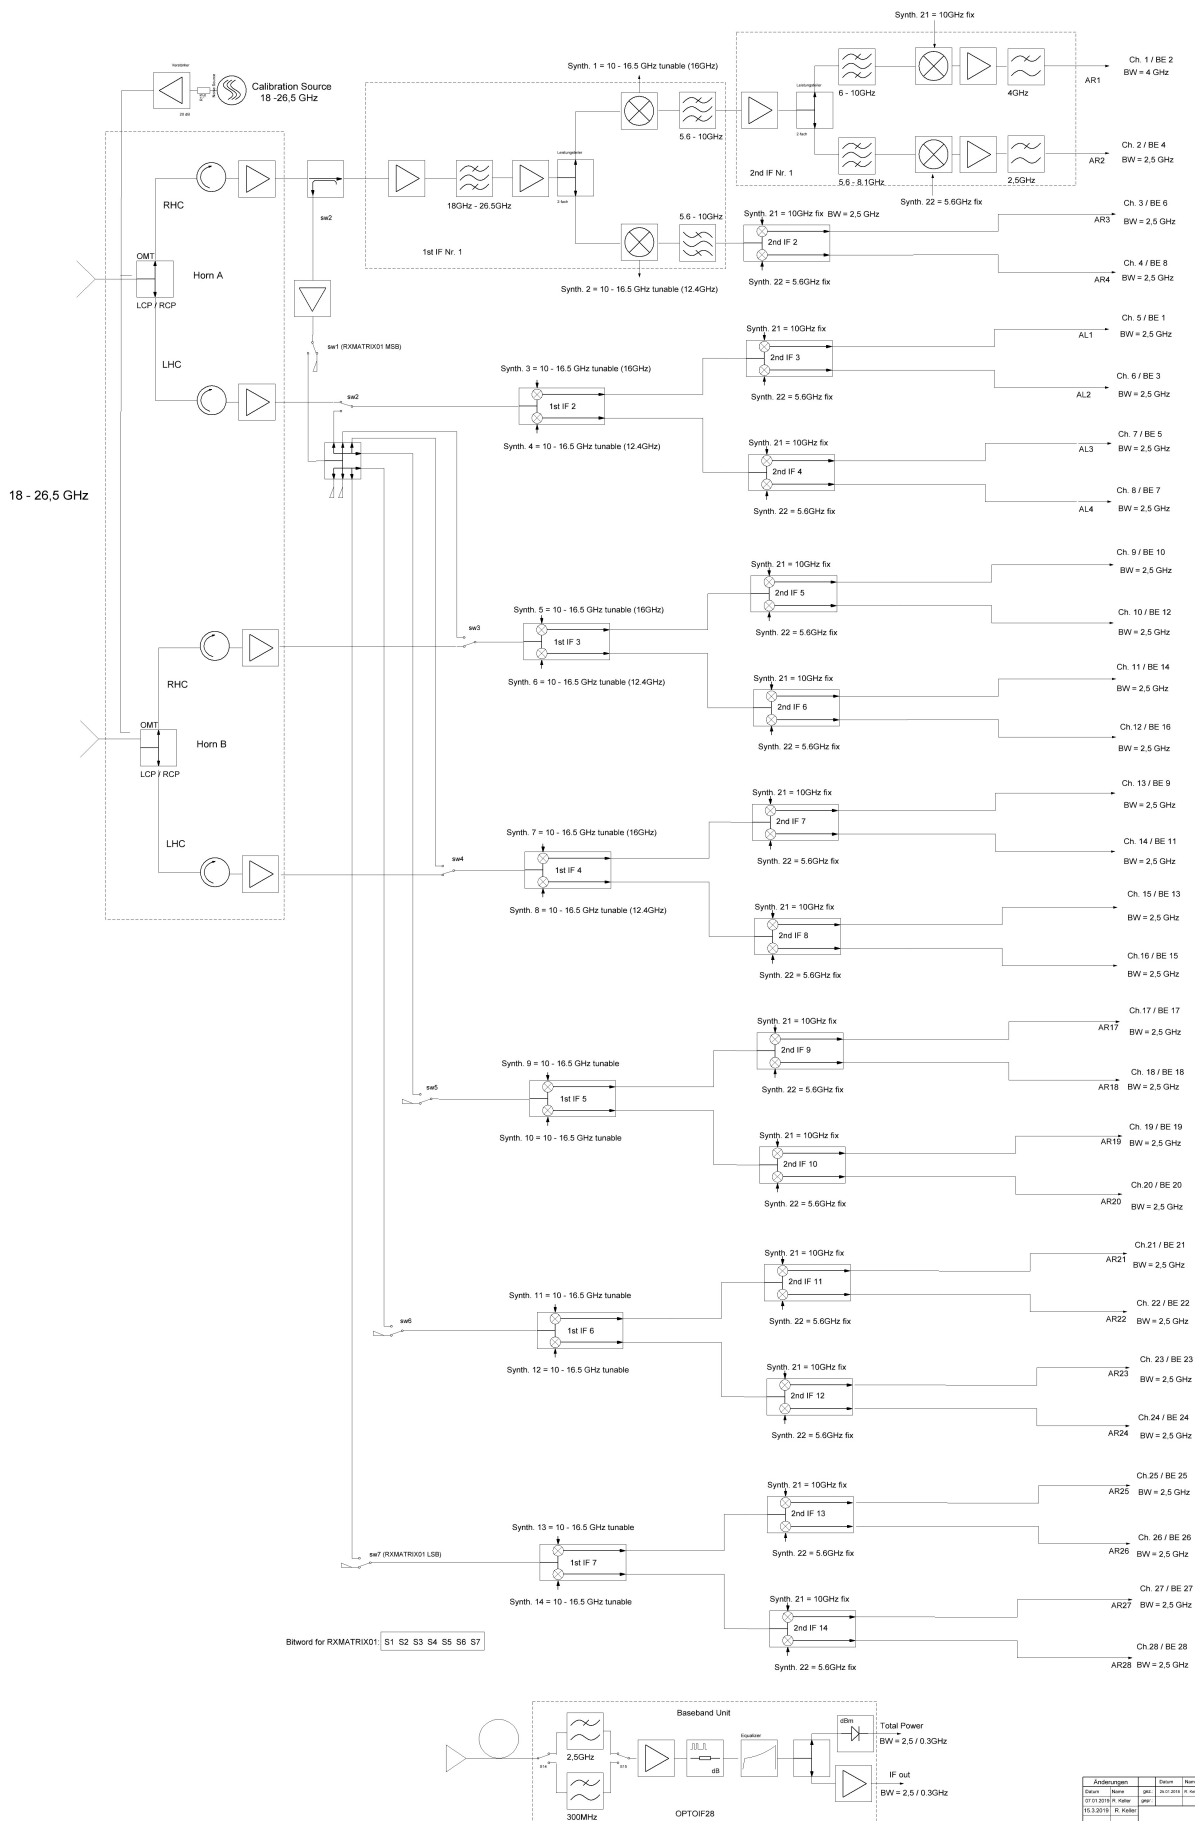

Simplified **Block Diagram** of the complete receiver, (RK on 15.3.2019)

[Block Diagram](#) of the 2nd IF conversion, (CK on 8.3.2019)

[Adresses and switch positions](#) of the synthesizer and switches, (CK on 27.4.2014)

From:

<https://eff100mwiki.mpifr-bonn.mpg.de/> - **Effelsberg 100m Teleskop**

Permanent link:

https://eff100mwiki.mpifr-bonn.mpg.de/doku.php?id=electronics:rx:techinfo:documentation_k-band_rx_s14mm&rev=1576234710

Last update: **2019/12/13 11:58**

