


Technical Documentation of the 1cm Receiver 27 - 38 GHz (P10mm)



Type	HEMT cooled
Channel	1
Receiver Noise Temperature	10-40 K
Bandwidth RF-Filters	See below filter combination
Polarization	Linear
Calibration	Noise Diode
Feed	Primary Focus Horn
Frequency Range	27 - 38.7 GHz
1.Local Oscillator	29.25 - 35.85 GHz (Multiplier 3*(LO1=9.75 - 11.95 GHz))
1.IF	2 - 4 GHz (Broadband)
2.Local Oscillator	LO2=3.75 GHz (fixed Phase Locked Oscillator)
2.IF	500 - 1000 MHz


Block Diagram

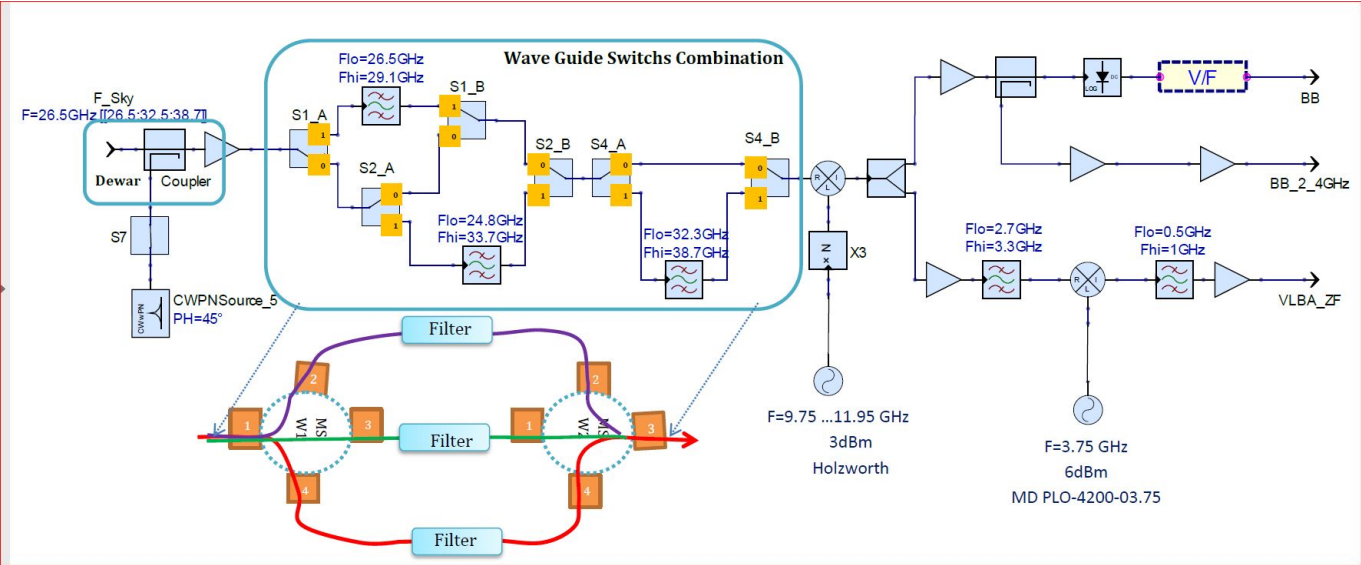

Simplified Block Diagram of [p10mm_receiver_withholzworth.pdf](#), (ZMK on 15.08.2019)

Receiver Noise Temperature

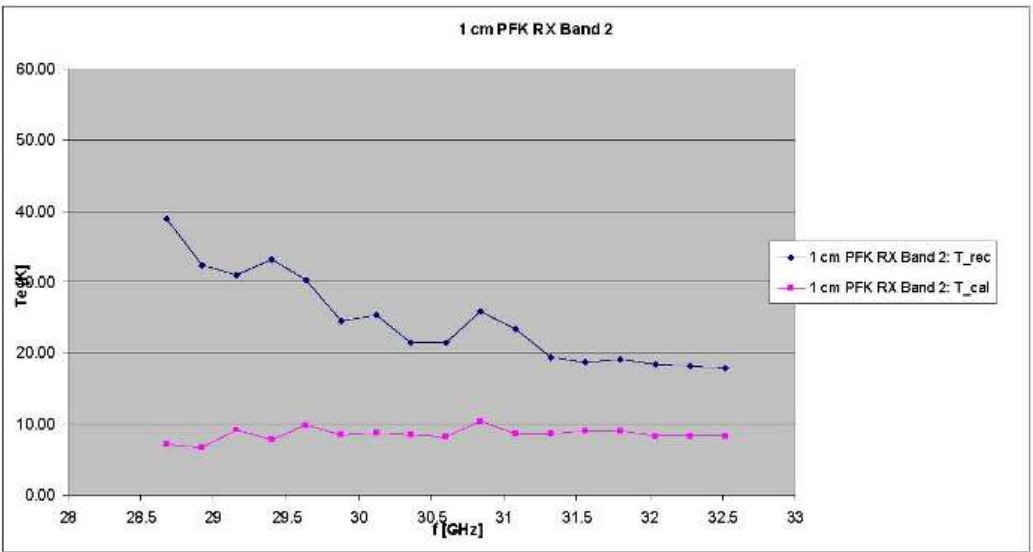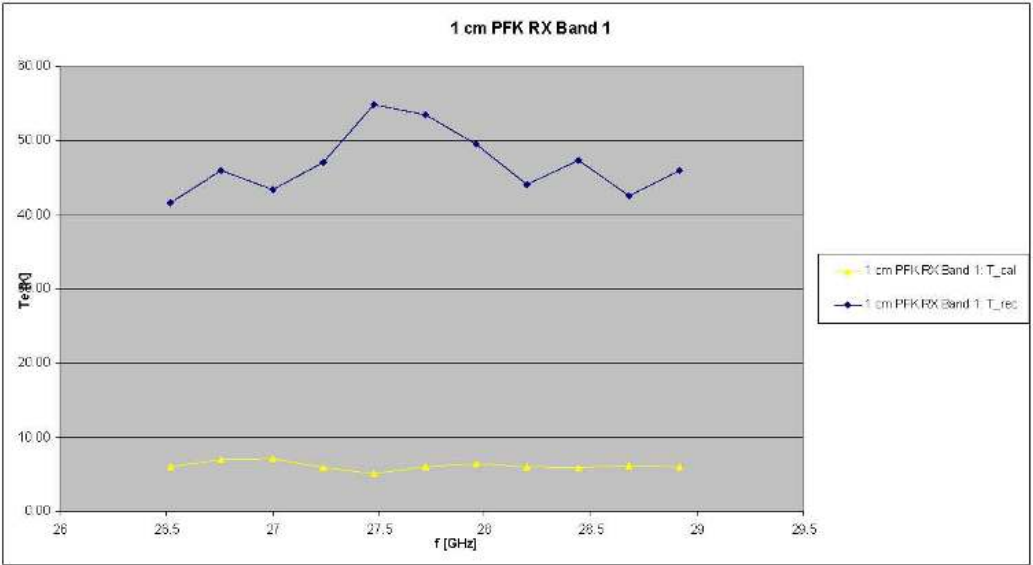

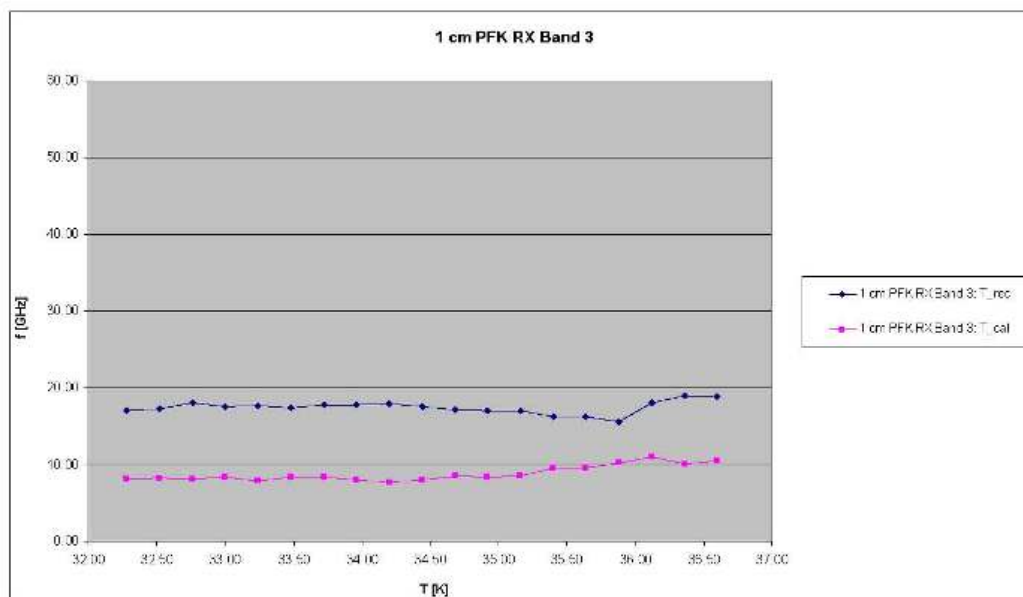

Comments

This system is equipped with 3 RF-Filters to suppress mirror frequency reception. During observation, the filter and ULO settings have to be selected according to the observation frequency (see block diagram). In March 2007 the LNA was replaced by an InP-HEMT MMIC-amplifier designed for the 9mm receiver. Therefore the noise figure at low frequencies is not ideal. This system is part of the Primary Focus Multi Frequency Box #1 (PM 1).

From:
<https://eff100mwiki.mpifr-bonn.mpg.de/> - Effelsberg 100m Teleskop

Permanent link:
https://eff100mwiki.mpifr-bonn.mpg.de/doku.php?id=electronics:rx:techinfo:documentation_p10mm&rev=1616745101

Last update: 2021/03/26 08:51

