


Technical Documentation of the 2.6cm Holography Receiver 11.7 GHz (P26mm)

Type	HEMT	Unooled
Channels	1	
Receiver Noise Temperature	65K	
Frequency Range	11.6965 GHz	
Bandwidth RF-Filters-fixed	15 MHz GHz	
Polarization	LHC	
Calibration	Noise Diode after 1. Amplifier	
1. Oscillator	ULO1 x 6	
1. IF	0 - 300 MHz	

Block Diagram

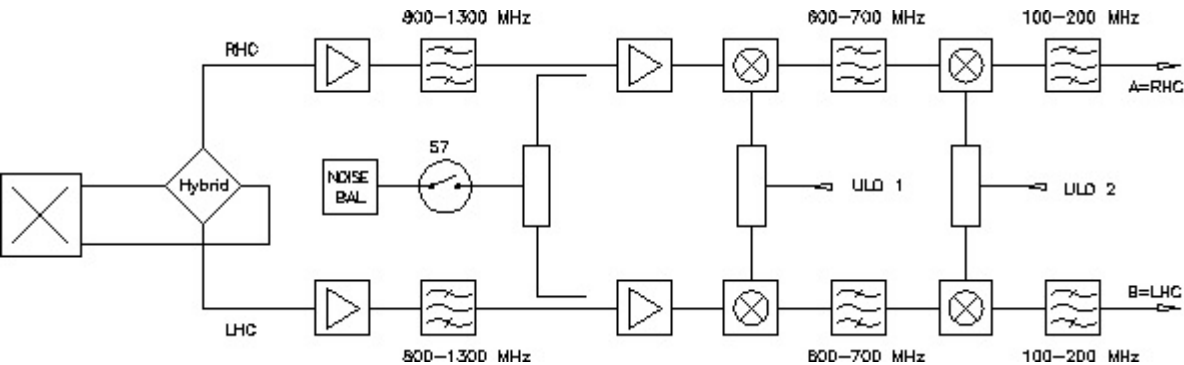

Commenets

The noise measurements were made in the laboratory with 2 MHz bandwidth and refer to the feed.

This system was constructed particularly for VLBI, but was already used during test measurements also for spectroscopy, continuum and pulsar observations. This frequency range is not free of interference. Observers wanting to do continuum or pulsar observations might have to search for a frequency range not obstructed by interference and/or use a narrower bandwidth.

This system is part of Primary Focus Multi Frequency Box #2 (PM2).

From:

<https://eff100mwiki.mpifr-bonn.mpg.de/> - Effelsberg 100m Teleskop

Permanent link:

https://eff100mwiki.mpifr-bonn.mpg.de/doku.php?id=electronics:rx:techinfo:documentation_p26mm&rev=1576572221

Last update:

2019/12/17 09:43