

# Reduction of pointing measurements

## Location of the Raw Data

The raw data of the 100m Effelsberg telescope is stored in MBFITS-Format. In Effelsberg the files are located in the directory /daten/Raw which should be available on every **Observer-PC**. Older data can be found in /daten/Raw/Raw-YYYY-MM. Most programs listed here support the flag "fdir" to point the program to the directory where the MBFITS data can be found. Default is always /daten/Raw.

Every 30 minutes the raw data is synced to Bonn. It is accessible in /eff/data/. Old data is accessible in /hsm/effarchive More details on the location of data can be found here under [Data storage and archive](#)

## Inspecting scans by hand using the Toolbox

The MBFITS data can be inspected with any program that understand FITS Format e.g. "fv" fits-viewer. You can look at the headers and tables and plot different data columns...

However, most users might prefer a kind of pre-reduced view where you see the amplitude of the scan calibrated in units of the calibration temperature and with real arcseconds for the scanning axis. This is provided by the "toolbox" program. The toolbox can be used on the **observer-PCs** (currently observer7 and observer4) using your normal MPI account. You only need to add /opt/bin to your PATH variable.

```
#bash
export PATH=$PATH:/opt/bin


#csh
set path = ($path /opt/bin)
```

Observers that don't have a MPI user Account can use the common **obs2** account.

The toolbox can be used interactively by calling

```
toolbox
```

from the command line. A file browser opens from which the scan can be selected (see Fig. 1). You can also select whether you want to have a ps-plot of the scan written to your current directory. By default you will find a .fit-file for every scan you looked at with some scan specific data and the fitted parameters.

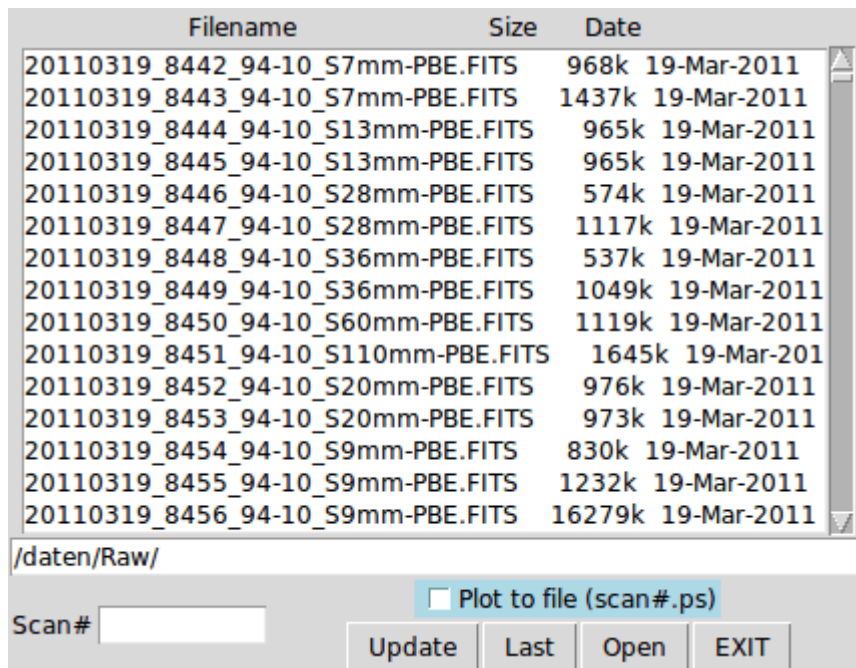

**Figure 1** Toolbox file browser.


Content of fit-file:

#							
# Source	Scan	direct	Subsc	MJD	LST		Azi
Elv	Amp	err		Offset	err	FWHM	err
ColS	NuLE	Parangle	Tsys		Cal		
3C286	4047	ALON	1	55497.2278085	30085.1592055		78.008
30.621	7.61715e-01	6.32183e-03		9.59	0.42	69.78	0.84
16.51	7.39	-46.17	8.673e+00	1.8370e+03			
3C286	4047	ALON	2	55497.2281492	30114.6799258		78.097
30.697	7.66583e-01	5.80441e-03		-0.38	0.38	68.84	0.75
16.51	7.39	-46.19	8.668e+00	1.8373e+03			
3C286	4047	ALAT	3	55497.2285233	30147.0884189		78.188
30.780	7.62980e-01	8.15973e-03		0.82	0.54	69.42	1.07
16.51	7.39	-46.21	8.659e+00	1.8389e+03			
3C286	4047	ALAT	4	55497.2288663	30176.8003259		78.274
30.859	7.61237e-01	7.00963e-03		1.35	0.46	68.80	0.91
16.51	7.39	-46.23	8.652e+00	1.8386e+03			

Another option, that is more appropriate for reducing a number of scans, is to use the toolbox from the command line:

```
toolbox scan=XXXX plot='/xs'
```

This will reduce scan XXXX and shows the plot in a PGPlot window (see Fig. 2).

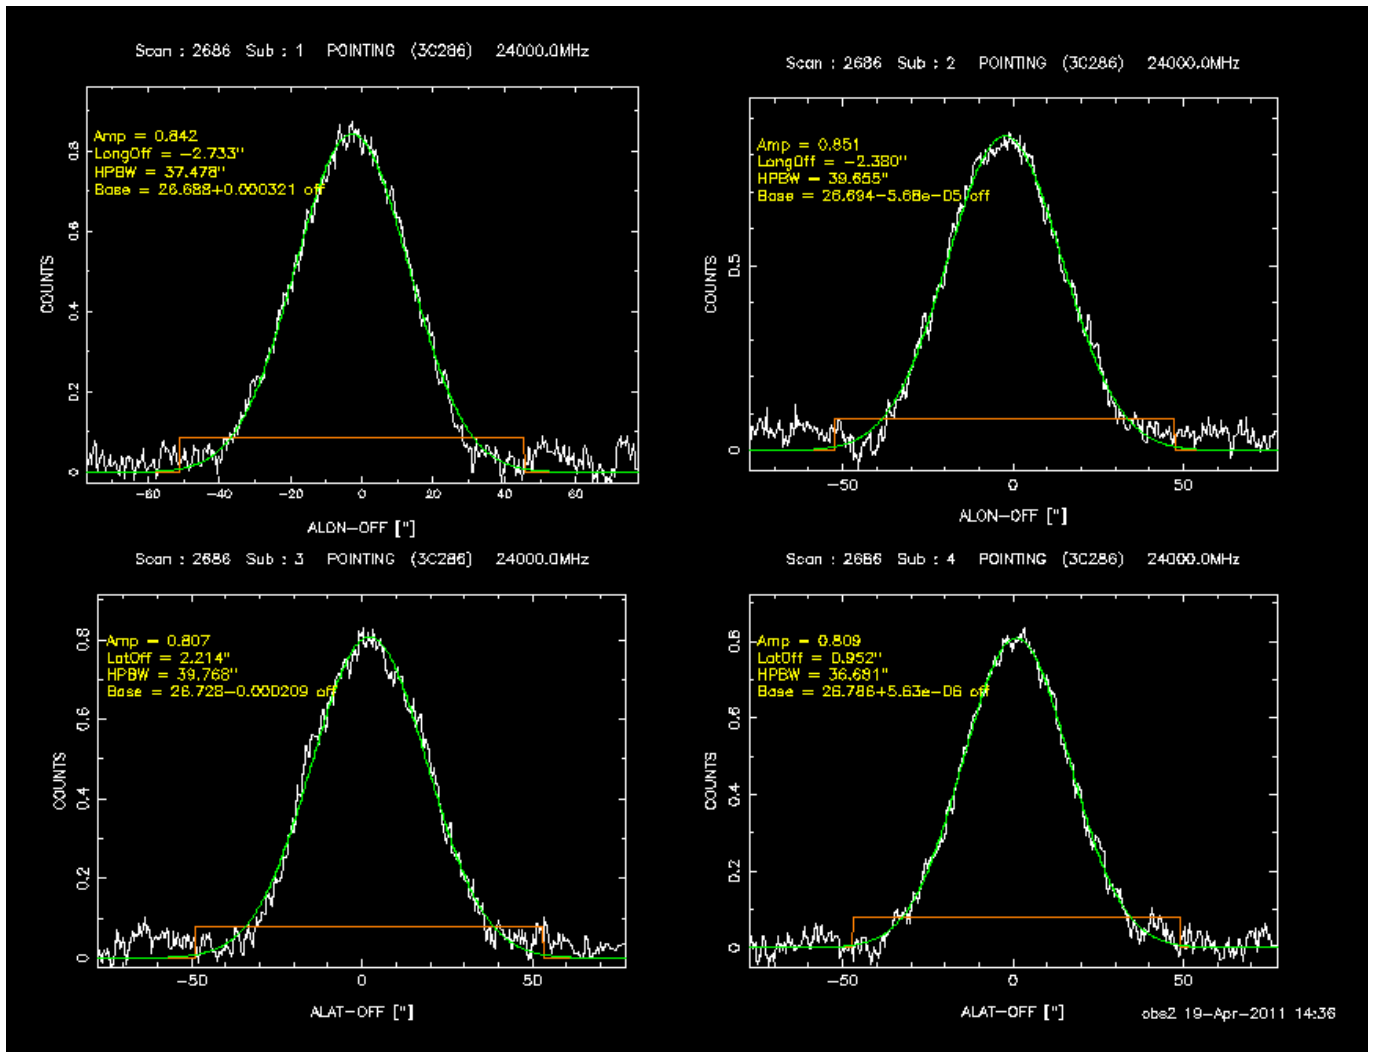

**Figure 2** PGPlot window of a cross scan. The data is baseline subtracted and a Gaussian is fitted.

## Toolbox Options

There are a number of options to control the toolbox. The order of their appearance on the command line is not important. Every keyword will be recognized.

Option	Comment
fdir='PATH'	Path to the MBFITS data
scan=xxxx	Direct selection of scan numbers. No File-Browser will be opened.
scan=last	Will be open the most recent scan.
sub=X	Displays sub scans X only., e.g. sub=2 shows sub-scan 2 only.
take=XXXX:x1,x2,x3,YYYY:y1,y2,y3,...	Reduces the given sub scan numbers of scan XXXX and YYYY together. All scans have to be specified with scan=XXXX,YYYY. Works also together with "aver" (see below)
del=XXXX:x1,x2,x3,YYYY:y1,y2,y3,...	Excludes the given sub scan numbers from the reduction of scan XXXX and YYYY. All scans have to be specified with scan=XXXX,YYYY. Works also together with "aver" (see below)

Option	Comment
plot	Enables postscript plots. Name of the plot: xxxx.ps, xxxx="scan number"
plot='/xs' or '/gif'	Opens plots in a PGPlot-XServer or writes gif-images: xxxx.gif
pol=u or q	in combination with plot the graphs for the Q and U stokes parameters will be shown
log10	plots the y-axis in log10 scale
yscale=min,max	allows to restrict the plotted y-axis range, e.g., yscale=0,10 for numbers from 0 to 10.
nos5	to reduce polarimetry data from receivers without the phase-switch (S5).
nofit	Displays the data as taken. No baseline subtraction and fitting is done.
baseline=[no,0,1, or 2]	Set the degree of the base line that is subtracted. no=no baseline, 0=constant offset, 1=liner fit, and 2=2nd degree polynomial.
cut=-x,x	Restricts the range of the Gaussian fit in scanning direction on the left (-x) and right (x). E.g. cut=0.1,0.1 will reduce the range by 10%.
aver	Causes an average over all longitude and latitude subscans
aver <b>and</b> scan=XXXX,YYYY,ZZZZ	Causes an average over all longitude and latitude subscans and scans (XXXX, YYYY, and ZZZZ). The resulting parameters will be written in XXXX+YYYY+ZZZZ.fit
use='(c[1]+c[2])/2' or '(fac1*c[1])+(fac2*c[2])/2'	Enable to add or subtract (e.g. for beam switch) any combination of available channels and to multiply them by factors. Useful to apply $T_{cal}$ [K] to the measured counts to get $T_A$ [K]. Which signals are exactly available is listed in the receiver folders in the control room and can be seen in the FEBEPAR header of the MBFITS file. As obs2 on Observer3 also FEBEinfo.py can be used to obtain information about the written channels.
spikes=X	Option to despike data with interference. X=hight of spike in multiples of the RMS (default 3). Despike is turned off if X=-1.
print	Writes out the data in ascii format. One file for every subscan with scan position, counts, and Gauss-fit is written.
fcent=x	Defines the starting point (centre) of the Gaussian fitting, 'x' in arcsec.
febe=XXX	Sets the frontend/backend combination, XXX, for scans that are observed with more than one.

Option	Comment
fit=n	Number of iterations for the Gaussian fitting. Default is 2.
header	Prints the MBFIT header.
horn=n	Defines the horn number 'n' to reduce. See also the "use" option, that is more flexible.
rfi=n	Will filter RFI peaks looking for peak increasing n times the rms.
window=n	Defines the window size in multiples of the beam width for the second iteration of the Gaussian fit (orange box in the plot window). Default is 1.22
<b>mapping options:</b>	For viewing maps or converting them to FITS or nod2 standards.
color	Shows color plots instead of black and white.
resize	Allows to plot the map on a new grid.
rfi=n	Will filter RFI peaks looking for peak increasing n times the rms.
tab=n	Allows to fill every n'th line with dummies for under sampled maps.
taper	Gaussian taper for the sinc-function.
xstart=n	Defines the start coordinate for the x-axis in degree.
<b>more dangerous option:</b>	"dangerous" means you have to know what you do
sig="(1,1)+(1,2)+(1,3)+(1,4)"	Definition of an individual formula to add channels and phases. Usually the phases 3 and 4 contain the calibration signal.
cal="-(1,1)-(1,2)+(1,3)+(1,4)"	Corresponding calibration formula. Phases 1 and 2 are subtracted to only get the calibration signal.
sig="(1,1)+(1,2)+(1,3)+(1,4)+(2,1)+(2,2)+(2,3)+(2,4)"	Another example: formula to add channel 1 and 2, e.g. LCP + RCP. But it is recommended to use the "use" option add or subtract channels.

## Observing Logs

All observations are logged in a MySQL data base. To see the content of the data base, call the program

```
obslog
```

on observer2. For more information see [Obslogger](#).

### Logbook.py

Logbook.py lists by default the last 1000 scans. This might take some time, because Logbook.py is

reading the original MBFITS data files to get the information. Using

```
Logbook.py 100 <fdir=directory>
```

it lists only the last 100 scans. The time range can be restricted by the option

```
Logbook.py 10000 tstart=YYYY-MM-DD tstop=YYYY-MM-DD
```

where "tstart" marks the more recent time (if not specified the print out starts today) and "tstop" specifies the stop time in the past. The 10000 is just chosen to be big enough to cover most time ranges. Logbook.py can be used only to produce logs from more recent data because it searches only in /daten/Raw.

For example:

```
obs2@observer3:~$ Logbook.py tstart=2011-04-18 tstop=2011-04-18
# SCAN  SUB  OBJECT          SCANTYPE  FEBE          PROJECT
DATE_OBS          MJD
....
 2692    2    3C345          FOCUS    P13mm-PBE    46-09
2011-04-18T01:45:17 55669.0731
 2691    4    3C345          POINT    P13mm-PBE    46-09
2011-04-18T01:42:56 55669.0715
 2690    4    3C345          POINT    P13mm-PBE    46-09
2011-04-18T01:40:05 55669.0695
 2689    2    3C345          FOCUS    P13mm-PBE    46-09
2011-04-18T01:38:44 55669.0686
 2688    4    3C345          POINT    P13mm-PBE    46-09
2011-04-18T01:36:22 55669.0669
 2687    2    W3MAIN          ONOFF    P13mm-FFTS    46-09
2011-04-18T01:26:08 55669.0598
 2686    4    3C286          POINT    P13mm-PBE    46-09
2011-04-18T01:17:28 55669.0538
 2685    2    3C286          FOCUS    P13mm-PBE    46-09
2011-04-18T01:16:08 55669.0529
 2684    4    3C286          POINT    P13mm-PBE    46-09
2011-04-18T01:13:45 55669.0512
....
```

## log.py

log.py is a small script that prints some more detailed information than Logbook.py.

```
Usage: log.py scan1 scan2 [fdir=<PATH>]
```

Options:

fdir=<PATH>: if the data are not in /daten/Raw any more

It can be also used to produce a log from older data in the archival directories, /datan/Raw/Raw-YYYY-MM specifying "fdir".

For example:

```
obs2@observer3:~$ log.py 2684 2692
# *** Date: 2011-04-18 Project-ID: 46-09 Observer-Operator: ALEX
***
# ** Temp = 3.7 deg C Humid = 70.0 % Press = 984.6 hPa
#Scan Sub Source UT LST FE-BE Mode Freq
Type Sw-mode AZI ELV Col* NULE z-Lin
2684 4 3C286 01:13:45 15:23:59 P13mm-PBE CONTINUUM 24000.00
POINT TOTP 236.9 61.0 4.3 2.1 -7.8
2685 2 3C286 01:16:08 15:26:36 P13mm-PBE CONTINUUM 24000.00
FOCUS TOTP 237.8 60.7 2.6 -1.9 -7.8
2686 4 3C286 01:17:28 15:27:44 P13mm-PBE CONTINUUM 24000.00
POINT TOTP 238.2 60.5 2.6 -1.9 -7.3
2687 2 W3MAIN 01:26:08 15:36:25 P13mm-FFTS SPECTROSCO 23407.18
ONOFF TOTP 369.2 23.5 -0.0 -0.5 -7.3
2688 4 3C345 01:36:22 15:46:40 P13mm-PBE CONTINUUM 23407.18
POINT TOTP 131.9 75.4 -0.0 -0.5 -7.3
2689 2 3C345 01:38:44 15:49:18 P13mm-PBE CONTINUUM 23407.18
FOCUS TOTP 133.4 75.7 1.2 7.7 -7.3
2690 4 3C345 01:40:05 15:50:24 P13mm-PBE CONTINUUM 23407.18
POINT TOTP 134.2 75.8 1.2 7.7 -7.6
2691 4 3C345 01:42:56 15:53:15 P13mm-PBE CONTINUUM 25056.25
POINT TOTP 136.0 76.1 0.4 6.1 -7.5
2692 2 3C345 01:45:17 15:55:56 P13mm-PBE CONTINUUM 25056.25
FOCUS TOTP 137.7 76.4 -0.1 7.3 -7.5
```

## Reducing a number of scans at once

Looking at single scan might be appropriate for checking the data during an observation, but for calibration or flux density monitoring a more automatic way is preferred. There is a collection of scripts and programs that can be used to perform all the tasks to obtain flux density calibrated data. The scripts are located in /home/obs2/bin on the observer3-PC.

## Raw Data Processing

The scripts and programs mostly use a file that contains all the scan numbers to be reduced. The scripts **log2scan.py** or **logbook2scan.py** produce such lists from observing logs written by log.py or Logbook.py, respectively.

In log2scan.py one can optionally restrict the frequency if the log contains entries at different frequencies.

```
log2scan.py
```

Usage: log2scan.py log-file [freq GHz]

---

The script **reduce.py** can be used to reduce a number of given scans using the toolbox with a list of options. Some example parameter files are stored in /home/obs2/flux\_monit/reduce-par. E.g., reduc28.par for the 2.8cm SFK receiver. Calling just reduce.py prints out some help as well.

```
obs2@observer3:~$ reduce.py
```

```
Usage: reduce.py par-file
```

The par-file consists of two parts

1. The Toolbox options: e.g.

```
# Toolbox options start here
```

```
start_options
```

```
#
```

```
# Beam switch
```

```
use='(c[1]+c[2]-c[5]-c[6])/2'
```

```
#
```

```
# Use XServer from PGPlot
```

```
plot='/xs'
```

```
#
```

```
# Average scans in ALON and ALAT
```

```
aver
```

```
end_options
```

2. A scan list:

```
#
```

```
# sub-scans can be deleted by the del= option
```

```
# in the second line: e.g.
```

```
# scan=0001
```

```
# del='1,4,5'
```

```
# to delete sub-scans 1, 4, and 5
```

```
#
```

```
# New root dir for data can be specified as e.g.
```

```
# fdir=/daten/Raw/Raw-2011-01
```

```
# default is /daten/Raw
```

```
scan=0001
```

```
scan=0002
```

```
scan=0003
```

For example:

```
> reduce.py reduc28.par
```

```
Remove previous fit-files
```

```
Start reducing data:
```



```

toolbox use='(c[1]+c[2])/2' plot='/xs' scan=8464
toolbox use='(c[1]+c[2])/2' plot='/xs' scan=8465
toolbox use='(c[1]+c[2])/2' plot='/xs' scan=8479
toolbox use='(c[1]+c[2])/2' plot='/xs' scan=8480
toolbox use='(c[1]+c[2])/2' plot='/xs' scan=8494
toolbox use='(c[1]+c[2])/2' plot='/xs' scan=8495
toolbox use='(c[1]+c[2])/2' plot='/xs' scan=8511
...

```

will average over channel 1 and 2 and plot the scans in a PGPlot window. If you prefer to save the figures instead of looking at them as they are being processed try just "plot" or "plot='/gif'". All options from the [table](#) can be specified in options section of the parameter file. In the scan section each scan entry can be followed by a delete line to exclude some subscans from the data reduction. That might help in case of RFI or short term weather effects. The keyword "fdir" can be used to change the PATH to the data. It has to be given only once and the following scan numbers will be all processed from this directory.

The resulting fit-files have an entry for the system temperature. This can be used to correct the data for opacity effects (see next section). Since Tsys is calculated from the baseline parameters it only works when a baseline was fitted and it was done in total power. If one uses a software beam switch the baseline will just be the residuals between the two horns and does not correspond to Tsys any more. In the case you want to use the software beam-switch to improve the fitting of the Gaussian it might be wise to first do one run with total power to produce a Tsys-file and then run the procedure again using software beam-switch to obtain a better fit.

## Correct for Opacity and Pointing Offset

A short introduction to the background of the further steps of the data calibration can be found [here](#). The procedure described here that fits the lower envelope of the Tsys vs. airmass distribution only works if you have several scans covering a larger range of elevations. An alternative would be to perform skydips during the observations to measure the opacity and and lower frequencies one can also use the common values from our [receiver page](#).

Since the amplitudes from the toolbox are in units of the Tcal one just have to multiply the given numbers by the Tcal to get the correct system temperature. The reduce.py procedure provides an all.fit file that contains all the single fit-files. The further programs work with this all.fit.

The script **weather.py** reads the weather information for the MBFITS files, multiplies the Tsys found in the all.fit by a given Tcal and prints out a weather.dat and a LIST.tsys, with the opacity information for each scan that is listed in the scanlist-file. The minimum zenith opacity is fitted from the Tsys vs. airmass distribution and is presented in the plot Opacities.eps. Weather.eps contains the weather info.

```

obs2@observer3:~$ weather.py
Task to read weather data from MBFITS files,
save them in ASCII format, and compute LIST.tsys.

Usage: weather.py scan-file [Tcal] [fdir=<PATH>]

```

The scan-file should contain the scan numbers to be reduced.  
Comments can be inserted with a leading '#', e.g.:

```
# Good pointing scans
2567
2568
#2569 removed because of RFI!
2570
...
```

Options:

Tcal: temperature of the noise diode to get correct Tsys (default=1)  
fdir=<PATH>: if the data are not in /daten/Raw any more

The script **corr\_point.py** allows to apply the opacity corrections from LIST.tsys or to apply a single value for all data. The question how to proceed will be ask when the the script is started. The amplitudes will be corrected for pointing offsets. Offsets in longitude will be applied to the latitude data and vice versa. To calculate the correction the actual FWHM of the Gaussian fit will be used. If you don't trust that fit the value after the Tcal is interpreted as the FWHM to use.

```
obs2@observer3:~$ corr_point.py
```

Task to reduce fit-files from Peters Toolbox

Usage: corr\_point.py scan-file [Tcal (K)] [FWHM (asec)]

The scan-file should contain the scan numbers to be reduced.  
Comments can be inserted with a leading '#', e.g.:

```
# Good pointing scans
2567
2568
#2569 removed because of RFI!
2570
...
```

For example the Tcal at 2.8cm is 7.5 K and scan numbers are stored in scanlist

```
obs2@observer3:~/ubach/measurements/2011_03_16_poi/2.8cm/0.Raw$
corr_point.py scanlist 7.5
```

```
*****
*           Procedure to analyse Cross-scans           *
*           from the 100m Effelsberg telescope         *
*                                                    *
*           Version 3.4  (I. Marti-Vidal)              *
*                       (T. Krichbaum)                 *
*                                                    *
```

```

*                      (U. Bach)                      *
*                      *                               *
*   adapted from A. Kraus corr_point.f Ver. 2.7       *
*                      *                               *
*****

```

Raw data must be in file: all.fit

Apply opacity correction?

No -> [n]

Apply a single value -> [s]

Apply computed values (LIST.tsys) -> [f]

n

No opacity correction!

Tcal=7.50 [K]

Write LIST.raw

Write Pointing.dat

In total there have been 312 data sets in 156 Scans.

<FWHM> = 69.09 +- 1.42"

<Off\_LON> = -1.13 +- 5.36"

<Off\_LAT> = 0.43 +- 5.56"

Write SCAN-AVG.dat

The applied corrections are stored in Pointing.dat the data for further processing in LIST.raw and the averages over LON and LAT of the raw scans are written in SCAN-AVG.dat. The LIST.raw file now contains one entry for each scan with the following information.

#	JD	Scan	Source	Flux	Err	Azi.	Elv.	UT	LST
par.Ang									
#	-----								
----									
#									
15519.4576	6894	3C454.3		27.5893	0.1693	261.8	27.7	22.98	3.30
41.0									
15622.2729	6896	3C48		2.6540	0.0159	271.8	43.7	18.55	5.62
49.4									
15622.3106	6905	3C295		2.6072	0.0189	38.4	26.4	19.45	6.53
-40.0									
15622.3167	6908	3C295		2.5999	0.0148	39.5	27.3	19.60	6.68
-41.2									
15622.3370	6914	3C295		2.6271	0.0156	43.3	30.4	20.09	7.16
-45.2									

. . . .

The next step will be to correct this data for the gain elevation dependence and to convert it from Kelvin to Jansky.

## Final Calibration

For frequencies below 2.5 GHz the gain of the Effelsberg antenna is more or less constant over the whole elevation range, but at high frequencies a gain curve should be applied to the data to correct for the losses. The gain curve for each receiver is given on the [receiver page](#). The Fortran-program **eff\_flux** can be used to correct the data for various effects including the gain curve and to calculate and apply the conversion factor from Kelvin to Jansky.

The program requests an input file called "eff\_flux.par". It is structured as follows, sorry most of the variable are called in German, but some comments are introduced on the right side here to explain the meaning.

```
##Control file for eff_flux
ANZAHL QUELLEN: [ 5]                                # number of sources
##Source name: 8 characters
3C273
3C279
3C286
3C295
3C309.1
3C345
4C39.25
NRA0150
0J287
##-----
ANZAHL ELEVATIONSKORREKTUREN: [ 1]                   # number of elevation
corrections
##source name ('0836+71') or 'allsour', JD time interval, poly. coeff. A0-A5
'allsour' 0.0 99999.9 0.88196 6.6278E-3 -9.2334E-5 0.0 0.0 0.0
##-----
KORREKTURKURVE (y/n): [n]                            # is there a free
correction curve*
##-----
ANZAHL ZEITKORREKTUREN: [ 2]                         # number of time
correction
##source (s.o.), JD time interval, coeff. A0-A3, and p,B1,B2 with
## B1*sin(p*t) und B2*cos(p*t)
'allsour' 0.0 99999.9 1.000 0.0 0.0 0.0 0.0 0.0 0.0
'NGC7027' 0.0 99999.9 0.981 0.0 0.0 0.0 0.0 0.0 0.0 # constant factor to
correct for partly
                                                    # resolve calibrator
##-----
ANZAHL KALIBRATIONEN: [ 1]                           # number of calibrations
##AJD time interval, cal.-factor,-error
```

```

0.0 99999.9 1.0 0.0
##-----
ANZAHL KALIBRATORQUELLEN: [ 8]                # number of prime
calibrators to calculate K/Jy
## name and flux density in Jy ('3C286'  7.58)
'3C286'      2.82
'3C295'      1.18
'3C196'      0.91
'3C138'      1.57
'3C48'       1.40
'3C161'      1.57
'3C147'      2.07
'3C123'      3.79

```

\* the correction curve should be named "Corr\_curve" and has the following form: three columns with JD corr-fact. err

Some example eff\_flux.par files can be found in /home/obs2/flux\_monit/eff\_flux-par/. The eff\_flux program creates several files.

- LIST.corr contains the corrected entries from LIST.raw
- FLUX.<source name> contain the individual calibrated scans of each source
- Averages gives a summary for all sources
- Calibrators reports the data of prime calibrators and states the conversion factor from Kelvin to Jansky. The factor can then be written into the eff\_flux.par. After the value was entered in eff\_flux.par the Calibrators file should give 1.0 as the calibrations factor.

The output of the program looks as follows

```

obs2@observer3:~$ eff_flux

*****
*           Analysis of flux density           *
*   measurements made at the 100m             *
*   radio-telescope in Effelsberg             *
*                                           *
*           Version 2.4                       *
*   Alexander Kraus, MPIfR                   *
*                                           *
*****

Files needed:
LIST.raw (total-power-Data) and
the commandfile Command.tot.
Maybe a time-dependent correction (File Corr_curve).
Commandfile read!
Starts to read data from LIST.raw
100 data sets read!

Derives averages!!

Starts writing results!!

```

Done!

From:  
<https://eff100mwiki.mpifr-bonn.mpg.de/> - **Effelsberg 100m Teleskop**

Permanent link:  
[https://eff100mwiki.mpifr-bonn.mpg.de/doku.php?id=information\\_for\\_astronomers:user\\_guide:reduc\\_pointing&rev=1456142596](https://eff100mwiki.mpifr-bonn.mpg.de/doku.php?id=information_for_astronomers:user_guide:reduc_pointing&rev=1456142596)

Last update: **2016/02/22 13:03**

